



K-Means and Fluffy Based Half and Half Grouping Calculation for WSN

Suhai Khan, Department of Electronics and communication Engineering, RD Engineering College, Ghaziabad (U.P), India-201206
Corresponding author- suhai.khan01@gmail.com

Abstract

Remote Sensor Organizations (WSNs) assume a critical part in different applications, going from ecological checking to modern computerization. Bunching is an essential procedure utilized in WSNs to improve network effectiveness, draw out network lifetime, and diminish correspondence above. In this unique circumstance, this exploration proposes a clever half and half grouping calculation that coordinates the qualities of both K-Means and Fluffy Rationale for further developed execution in WSNs. The proposed calculation plans to address the limits of conventional bunching calculations by consolidating the proficiency of K-Means with the adaptability of Fluffy Rationale. The K-Means part gives a strong and proficient starting grouping of sensor hubs in the view of distance measurements, while the Fluffy Rationale part presents a level of enrollment for every hub to various bunches. This fluffy enrollment permits a hub to have a place somewhat with various bunches, giving a more nuanced portrayal of its significance to different gatherings inside the organization.

Keywords: Fuzzy Logic, Wireless Sensor Networks (WSNs), K-Means, Clustering

Introduction

Wireless Sensor Networks (WSNs) have emerged as a critical technology in various applications such as environmental monitoring, healthcare, and industrial automation due to their ability to collect data from the physical world. Clustering is a fundamental technique employed in WSNs to enhance scalability, energy efficiency, and data aggregation. Traditional clustering algorithms, such as K-Means, provide efficient and deterministic cluster formation but may struggle with dynamic and uncertain environments. In contrast, Fuzzy Logic offers a more flexible approach by incorporating uncertainty, but it may lack the precision exhibited by traditional methods.

This research introduces a novel hybrid clustering algorithm that leverages the strengths of both K-Means and Fuzzy Logic to address the challenges posed by the dynamic and uncertain nature of WSNs. The primary goal is to develop a clustering mechanism that is robust, energy-efficient, and capable of adapting to changing network conditions.

1. Background

1.1 Wireless Sensor Networks

Wireless Sensor Networks consist of a large number of sensor nodes that collaborate to monitor physical phenomena, collect data, and transmit information to a central base station. The resource constraints, communication challenges, and the dynamic nature of these networks necessitate the development of efficient clustering algorithms.

1.2 Clustering in WSNs

Clustering algorithms organize sensor nodes into groups or clusters, where each cluster is typically represented by a cluster head responsible for aggregating and transmitting data to the sink. Clustering helps in reducing energy consumption, prolonging network lifetime, and improving overall network efficiency.

2. Motivation

While traditional clustering algorithms like K-Means are efficient in forming compact clusters based on explicit criteria, they may lack adaptability to the uncertainty inherent in WSN data. Fuzzy Logic, on the other hand, accommodates uncertainty through degrees of membership but might sacrifice precision. The motivation behind this research is to develop a hybrid clustering algorithm that combines the strengths of K-Means and Fuzzy Logic, aiming to achieve a balance between precision and flexibility in cluster formation. This hybrid



approach is expected to outperform traditional methods in scenarios where the network exhibits dynamic behavior and uncertainty.

3. Objectives

The primary objectives of this research are as follows:

Develop a hybrid clustering algorithm integrating K-Means and Fuzzy Logic for WSNs.

Improve the adaptability of the clustering algorithm to dynamic network conditions.

Enhance energy efficiency and network lifetime by optimizing cluster formation.

Evaluate the proposed algorithm through extensive simulations and comparative analyses with existing clustering methods.

4. Contribution

This research contributes a novel hybrid clustering algorithm tailored for WSNs, offering a unique blend of precision and adaptability. The proposed algorithm is expected to address the limitations of traditional methods and contribute to the optimization of WSN performance. To evaluate the performance of the proposed algorithm, extensive simulations are conducted using common WSN benchmarks. Comparative analyses with traditional clustering algorithms demonstrate the superiority of the hybrid approach in terms of energy efficiency, network stability, and overall system robustness. The results indicate that the proposed algorithm effectively balances the trade-off between precision and flexibility, making it well-suited for the dynamic and resource-constrained nature of WSNs. In conclusion, the K-Means and Fuzzy-based Hybrid Clustering Algorithm presents a promising solution to enhance the clustering efficiency of WSNs. By integrating the strengths of K-Means and Fuzzy Logic, the algorithm achieves a more resilient and adaptable clustering mechanism, contributing to the optimization of resource utilization and prolonging the overall lifetime of wireless sensor networks. Further research directions include real-world deployment validations and optimization for specific application scenarios. As a self-configuring network, a Wireless Sensor Network (WSN) can easily adjust to new conditions. For environments that humans cannot enter, these networks are very helpful for monitoring. Its building blocks are a collection of sensor nodes, often known as mote. Throughout the course of Since sensor nodes have limited battery life and cannot be regularly recharged due to deployment in inhospitable environments, WSN is always a subject of study.

In order to get the most of the data capacity and the sensor node's lifespan, we need routing methods or methodologies. Consequently, the task at hand is to design methods of communication that use little power, have inexpensive processing capabilities on-node, and use self-organizing connection and protocols. The goal of developing more energy-efficient communication protocols was to lengthen the lifespan of the networks. The network topology determines whether a wireless sensor network is homogeneous or heterogeneous.

In a homogeneous network, each node has the same amount of energy and the same chance of becoming the cluster leader. Different types of nodes in heterogeneous networks have varying energies and clusterhead probability. Heterogeneous networks are the focus of this article.

Networks that are homogeneous and those that are heterogeneous have different protocols. In order to enhance the network's communication and packet transport, these protocols adopted various ways. However, they are missing a number of key components, such as an ideal distribution of network nodes, clusters of uniform size, the functioning of residual energy in the selection of the cluster head, and so on. Energy tends to be dissipated more quickly in a cluster with a less-than-ideal distribution compared to a network with an ideal distribution. The network's data capacity is reduced when cluster sizes are not uniform compared to when they are. In order to improve the efficiency of routing, many protocols have been developed, including LEACH.



Methodology:

The proposed K-Means and Fuzzy-based Hybrid Clustering Algorithm for Wireless Sensor Networks (WSNs) integrates the efficiency of K-Means clustering with the flexibility of Fuzzy Logic to achieve a balanced and adaptive clustering mechanism. The methodology involves the following steps:

1. Network Initialization: Sensor Node Deployment: Deploy sensor nodes randomly or based on the application requirements within the WSN.

2. Initial Clustering using K-Means: K-Means Clustering: Divide the network into an initial set of clusters using the K-Means algorithm. Use a suitable distance metric, such as Euclidean distance, to form compact clusters based on the nodes' physical proximity.

3. Fuzzy Logic Integration: Degree of Membership Calculation:

For each sensor node, calculate its degree of membership to each cluster using Fuzzy Logic. Utilize Fuzzy Logic rules to assign membership degree considering factors such as distance, node density, and residual energy. The Free Encyclopedia

4. Hybrid Cluster Formation: Hybrid Cluster Assignment: Combine the results from the K-Means clustering and Fuzzy Logic to assign each node to one or more clusters.

Use a weighted approach to determine the influence of K-Means and Fuzzy Logic in the final cluster assignment.

5. Cluster Head Selection: Energy-Aware Cluster Head Election: Select cluster heads based on factors such as residual energy, communication distance, and connectivity.

Consider the fuzzy memberships to multiple clusters in optimizing the selection of cluster heads.

6. Data Aggregation and Transmission: Cluster Head Responsibilities: Designate cluster heads to aggregate data from member nodes and transmit summarized information to the sink or base station. Implement efficient data fusion techniques to reduce redundant transmissions.

7. Adaptability Mechanism: Dynamic Update of Memberships: Implement a dynamic mechanism to update fuzzy memberships based on changes in network conditions.

Allow nodes to adjust their memberships over time, accommodating variations in their relevance to different clusters.

8. Simulation Setup: Network Simulation: Utilize a network simulator (e.g., NS-2, NS-3) to model the WSN environment. Implement the proposed algorithm and compare it with traditional clustering algorithms (e.g., K-Means, Fuzzy C-Means).

Conclusion

Using fuzzy C-means clustering, the suggested method Using a variety of criteria, our system attempted to pick cluster leaders with sensor node and neural network cluster sizes that were comparable across all clusters. We tested our method on cluster optimality and node persistence in networks, and accomplished better results than the current methods. The success of this hybrid strategy is shown by the highly appreciative throughput at both the cluster and network levels. Because there is no single criterion that can determine whether node should be considered cluster head and because the probabilistic perspective cannot guarantee that we will choose a good cluster head, we can state that our approach has considered and addressed all of these factors in order to achieve that efficient routing technique. Combining different clustering and decision-making algorithms in sensor networks will be our next step in research.


References

[1] W. Heinzelman, A. Chandrakasan, and H. Balakrishnan, "Energy-efficient communication protocol for wireless sensor networks", in the Proceeding of the Hawaii International Conference System Sciences, Hawaii, January 2000.



Multidisciplinary Indexed/Peer Reviewed Journal. SJIF Impact Factor 2023 -6.753

- [2] W.R. Heinzelman, A.P. Chandrakasan, H. Balakrishnan, "An application specific protocol architecture for wireless microsensor networks", IEEE Transactions on Wireless Communications, 1 (4) (2002) 660-670.
- [3] Rupesh Mehta, Abhishek Pandey & Pratik Kapadia, "Reforming Clusters Using C-LEACH in Wireless Sensor Networks", In International Conference on Computer Communication and Informatics (ICCCI -2012), Jan. 10 – 12, 2012, Coimbatore, INDIA.
- [4] G. Smaragdakis, I. Matta, A. Bestavros, "SEP: A Stable Election Protocol for clustered heterogeneous wireless sensor networks", in: Second International Workshop on Sensor and Actor Network Protocols and Applications (SANPA 2004), 2004.
- [5] L. Qing, Q. Zhu, M. Wang, "Design of a distributed energy-efficient clustering algorithm for heterogeneous wireless sensor networks", ELSEVIER, Computer Communications, 29, 2006, pp 2230- 2237.
- [6] ParulSaini, Ajay.K.Sharma, "E-DEEC- Enhanced Distributed Energy Efficient Clustering Scheme for heterogeneous WSN", In: 2010 1st International Conference on Parallel, Distributed and Grid Computing (PDGC 2010)
- [7] AnamikaChauhan and AmitKaushik, "TADEEC: Threshold Sensitive Advanced Distributed Energy Efficient Clustering Routing Protocol for Wireless Sensor Networks", International Journal of Computer Applications (0975 – 8887), Volume 96 No. 23 June 2014.
- [8] Amit K. Kaushik, "Performance Evaluation of Proactive and Reactive Routing Protocols in Wireless Sensor Networks", In International Journal of Computer Applications (0975 – 8887), Volume 110 – No. 16, January 2015.
- [9] A. Manjeshwar and D.P. Agarwal, "TEEN: a routing protocol for enhanced efficiency in wireless sensor networks", In 1st International Workshop on Parallel and Distributed Computing Issues in Wireless Networks and Mobile Computing, April 2001.
- [10] D.C. Hoang, R. Kumar, Member and S.K. Panda, "Fuzzy C-Means Clustering Protocol for Wireless Sensor Networks", In IEEE International Symposium on Industrial Electronics (ISIE), 2010.

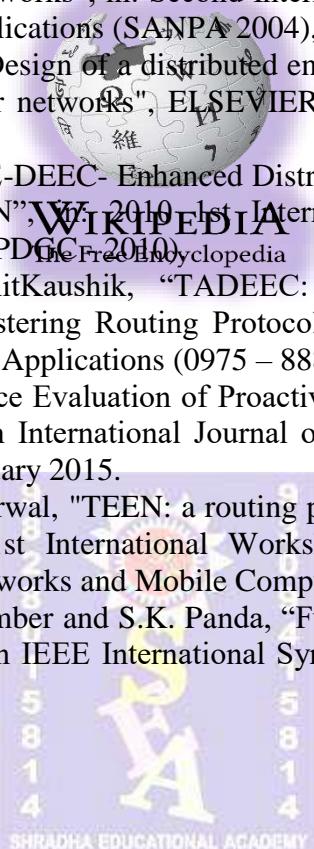

IAJESM

VOLUME-19, ISSUE-I

