



Visual Cryptography Technique for Enhancing the Security and Contrastness of Image Transaction-A Review

Sunita Kumari, Research Scholar, Department of Computer Science Engineering, VNS Group of Institutions, Bhopal,
Email: sunitashambhusingh2015@gmail.com

Dr. Shashikant Pandey, Professor, Department of Computer Science Engineering, VNS Group of Institutions, Bhopal,
Email: shashikant3017@gmail.com

Prof. Deepak Mishra, Assistant Professor, Department of Computer Science Engineering, VNS Group of Institutions, Bhopal,
Email: shashikant3017@gmail.com

Abstract

Today image improvement is exceptionally weak instrument within the field of picture handling those points to progress the picture quality. Histogram equalization is the foremost prevalent strategy for picture improvement. The most disadvantage of histogram equalization is over upgrade and makes an unnatural see. These can be overcome by the Bi-Histogram Equalization. Bi-Histogram Equalization is part the picture histogram into two sub-histograms, utilizing cruel as edge, and supplanting aggregate dissemination work with two smooth sigmoid of the sub-Histograms. Image quality measurements are carried out. AMBE, MSE and PSNR are utilized to assess the adequacy of the proposed strategy.

Keywords—Image enhancement, Color image, Histogram equalization, Color space.

1. INTRODUCTION

A facsimile of a mainframe representation is matching to the inventive. This have in countless occurrences, persuade to the use of mainframe pleased through malevolent target. Cryptography is the discipline and knack of thrashing undisclosed data in a congregation cable (e.g. content, icon, aural, capture, and so on.) [2]. The opinion of a cryptography algorithm is thrashing a large quantity of covert data into a significant host media such that the rooted underground information are obscured to shun the attack of illegal persons. One method to save from harm multimedia data alongside prohibited recording and retransmission is to insert a signal called digital signature or rights tag or watermark that validates the owner of the information [7]. Information hiding methods to insert less important specifics in mainframe media have made substantial development in modern years create a center of attention from both academia and industry. Methods have suggested for selection of applications, counting possession defense, authentication right of entry manage.

Cryptography is intent in creation an enhanced Cryptography system with enough and competent Cryptography methods. In cryptography, here be thrice most important objectives including ever-increasing hiding capability strength to assured attacks and rising protection level [2]. The ability of encrypting message wrapped medium as audio, picture, video files or text as Cryptography. Modern, cryptography approved by combining of cryptanalysis and Cryptography methods for protected communication of mainframe data. Cryptography relies on probing the subsisting. Cryptography algorithm and confronts. Cryptography based on recovering sheltered message of data. The earlier effort in Cryptography gives an important idea of Cryptography to new investigators. Exceptional technologies have been situating in to save from harm personal data. The great Cryptography programs for hiding MP-4 or rapid time multimedia files are true cryptography.

A feature of a mainframe reflection is equal to the ingenious. This has in many illustrations led to the employ of mainframe pleased among malevolent idea. One-way to defend multimedia data against prohibited recording and retransmission is to put in a signal called digital signature or exclusive rights label or watermark that confirms the holder of the data. Data hiding, methods to implant secondary information in digital media have made significant improvement in recent

years and attracted concentration from both academic world and industry world. Methods include projected for a assortment of applications including rights security, authentication and precise to exploit organize. Imperceptibility, strength beside reasonable processing for example compression and the competence to conceal several crumbs be indispensable but to a certain extent inconsistency conditions designed for several data thrashing applications [9]. With cryptography, way based on GA offered which protected against RS thrats. This technique in initial step implants secret bits into host image just similar to simple LSB and in second step modifies pixel values to build steno image RS parameters sit in protected region.



Figure: 1.2- Type of data hiding by cryptography tool

2. PROBLEM STATEMENT

According to principle of steganography is to hide the occurrence of statement while the rationale of cryptography is to make the statement impenetrable by adapting the bit torrents by means of hidden explanations. The advantage of steganography, ended cryptanalysis is to the aggressors are not drawn in communicating through mail amid sender and receiver even as the encrypted data communication magnetizing from the attackers. The accessible loom engenders carves pixels, based on pixel reversal, random decrease in original pixel and subtractions of the resourceful pixel. The innovative undisclosed picture is divided to it reveals the surreptitious figure after OR procedure of qualified shares.

With these method reveals reduced pixel expansion, required in favor of repossession of the concealed image. However, separating pixels keen on two or further subordinate pixel facilitates secret picture retrieval through additional impairments and poor resolutions. This advance moreover fallout in reduced disparity, whatever disgraces the perceptibility and concert for retrieval of the undisclosed icon, as the compare of an illustration is an incredibly important characteristic by which the image is nearby judged. My proposed techniques overcome the hitch of the accessible loom by pertaining colon effectiveness in attribute demesne for direct contrast improvement in the output secret image. To achieve contrast enhancement, a novel pretense trapped on with the effort assessment jointly through the sigmoid role is transient over the objective image, activates on its pixels one by one. The resulting icon possesses a much higher readability and proves highly effective in dealing through poor contrast images. This approach augments information in images exclusive of distressing the details or rising any amount of noise present to the resulting image.

3. MOTIVATION

My motivation of this study is to unify scrambling and information insertion to complement each other. This study focuses on unify information thrashing for image in both the attribute and compressed domains. In addition, a general framework proposed to incarcerate abnormal techniques of unification. It is significant to study how the unification techniques are clever to provide more flexibility by relaxing confident requirements and the common properties that they allocate. To resist to RS analysis, the influence on the correlation of pixels needs to compensated. The reimburse can realized by modifying other bit planes. However, the implementation may be computational infeasible.



4. OBJECTIVE

The in general plan of this work affirmed below:

- ❖ To develop an algorithm that make accessible secret image that have a higher readability.
- ❖ To propose a methods which accessible highly efficient contrast improved secret images.
- ❖ To propose an advance that improves attributes in metaphors with no have an effect on the reflection or growing any number of noise present to the resultant image. Improve the visibility issue in the resultant image thus create it simple to take an assessment and build available better protection.
- ❖ To decline calculation is difficulty.
- ❖ To conquer the difficulty of pixel expansion low contrast in subsisting algorithm.

5. LITERATURE REVIEW

In this Chapter contains related work on Visual Cryptography Techniques. Also existing investigates work discussed that is performed by various researchers. Here have been numerous published studies of Visual Cryptography Techniques. Most of them, however, have concentrated on reversing black-and-white images and accurate now a small quantity of them have proposed approach for processing gray-level and color images.

In this research, writer has intended a new method based on tunable graphic image excellence and data lossless technique in spatial sphere supported on a genetic algorithm (GA). The most significant suggestion of that technique is demonstration the steganography difficulty as an examination and optimization trouble. Here author has generated an effort to get most wonderful arrangement for introducing modified top secret information in host image to accomplish high level of protection. The procedure of inserting is accomplished in two most important steps; primarily they adjust top secret bits and then to insert it into host image. Due to swarming image in extraordinary positions in characterized by arrange of scanning host pixels and opening situation of scanning and most outstanding LSBs of each pixel [1]. On the other hand frequent methods have been planned for image steganography, incomplete learning have been done on meta heuristic-based image steganography and these attempts could not at offer reasonable causes for advantage of their approach. An investigational consequence demonstrates that in evaluation with subsisting traditional steganography methods, display that the recommended algorithm not only achieves high embedding competence but in adding up get betters the PSNR of the stego image [2, 3].

Here author [15] has in receipt of demonstration on the request of wavelet adapt and genetic method (GA) in a novel steganography methods. Here they attempt to make available effort for a GA based mapping task to insert data in discrete wavelet transform (DWT) coefficients in 4*4 blocks on the embrace image. The optimum pixel alteration process (OPAP) is expensive following inserting the message [6, 8]. Here they attempt to operate the frequency field to get improved the strength of steganography and then they place into practice GA and OPAP to attain an most favorable mapping purpose to condense the modification error among the concealment and the stego-image, consequently humanizing the walloping capacity with low misrepresentations. An untried consequence demonstrations that in assessment reveal that the new method do improved than increased steganography system based on wavelet transform in expressions of PSNR and volume, 39.94 dB and 50% congruently.

Latest morphed steganographic method is planned [22] in this paper. Basically the image safety is a difficult problem in now these days. So here author using Steganography procedure for thrashing clandestine information in wrap medium. The Least Significant Bit is a typical Steganographic approach that has several restrictions. The disadvantages are less capacity to hide



from view data, reduced stego image quality, and imperceptibility. Here author has to focuses on these disadvantages and new steganographic approach is planned based on the morphing conception is being used for image steganography to overcome these disadvantages. The PSNR and standard deviation are well thought-out as determine to get better stego image quality and morphed image assortment, correspondingly [7, 10].

The stego keys are produced during the transformed steganographic implanting and removing procedure. Stego keys are employed to implant and remove the secret image. As compare on experimental results with existing approach which is based on hiding capability and PSNR by proposed algorithm accomplishes improve in defeat ability, stego image superiority and imperceptibility. The experimental results were compared with situation of the art steganographic techniques [13].

In this proposed system [26], here they studied the steganographic standard of data hiding in customary digital images. This proposed system presents a new method to increase the information hiding capacity and the unnoticeable of the image after inserting the top secret message. In proposed work Optimal Pixel modification method also useful to minimize the error difference between the cover and stego image. By this effort best belongings have been acquired as compared to offered efforts. The proposed steganography approach decreases the implanting error and presents advanced embedding capacity. Detection of message survival will be very inflexible for those stego images that manufactured using the proposed approach. In experimental result shows the uppermost implanting ability and security against Reversible Statistical threats.

Chen and Lin [14] suggest a new steganography technique model which embeds the secret messages in frequency domain to give you an idea about that the PSNR is unmoving a acceptable measurement still when the uppermost competence case is helpful. By give the impression of being at the effects of replication the PSNR is unmoving a slow down estimation yet when the uppermost competence is useful.

This is appropriate to the diverse distinctiveness of DWT coefficients in abnormal sub-bands. In view of the fact that, the most fundamental element i.e. the low frequency measurement is kept back unchanged while the secret messages or information are inserted in the high frequency sub-bands i.e. corresponding to the edges part of the image super PSNR is not a invented effect. As well, corresponding safety measures is continued as well in observation of the fact that no message or information can be removed without the Key matrix and decoding rules [17, 20].

In this paper [15] demonstrated a new method for image steganography based on DWT. This document shows a new technique for Copy steganography based on DWT where DWT is utilized to alter original image i.e. cover image from spatial domain to frequency domain. Originally, two dimensional Discrete Wavelet Transmuted (2-D DWT) is obtainable on a gray equal concealment image of size $M \times N$ and Huffman indoctrination is presented on the top secret messages/image before inserting. Then each bit of Huffman code of top secret message/image is inserted in the high frequency coefficients effected from Discrete Wavelet Transform. Image value is to be progressed by protecting the wavelet coefficients in the low frequency sub-band as well.

J. K. Mandal et al. here demonstrated another GA-based algorithm named DEGGA. Mainly focal point in this process is on huge quantity of concealed information and the effects are evaluated with an additional technique by Ran- Zan et al. [16]. In Mandal technique, huge quantity of message/ image is inserted in spatial domain using 3×3 masks from the source image. Here they

use four bits of the top secret message / image is inserted per byte of the source image onto the rightmost 4 bit of each pixel. And then alteration is useful on the inserted image. In addition, a technique of bit management is useful to maintain the dependability far above the ground. In the procedure of inserting measurement of the secret message or image pursued by the substance of it. Turn around procedure is go altered during decoding. (GA) Genetic algorithm is utilized to improve a safety measures stage.

A variety of statistical parameters calculated that are evaluated with the Ran Zan et al. technique give you an idea about that recommended DEGGA acquired enhanced effects in conditions of PSNR. Here they are using gray scale image for protected message broadcast. A confirming image of size $m \times n$ is chosen as top secret message. The dimension of the host image is $p \times q$. Input: Host image of size $p \times q$, confirm image of size $p \times q$. In chasing, inserting algorithm is recorded. Output of algorithm is inserted image of size $p \times q$. The reason is introducing the authenticating image i.e. secure message bitwise into the source image [17].

As Using Genetic Algorithms which supported on the method of ordinary genetics and the assumption of development here they can propose a common technique to show the steganography development to the most excellent arrangement for data hiding [68]. In modern years various creative steganography strategies have been recommended. Among all the approach, LSB (least significant bit) substitution method is extensive utilized due to its ease and enormous competence. The size of LSB steganography algorithms insert messages in spatial domain for example BPCS, PVD [22].

Some additional for example J steg, F5, Outguess, insert messages in DCT frequency domain (i.e. JPEG images). In the LSB steganography, top secret message is redevelop into binary string. Then the least significant bit-plane is reinstated with the binary string. The LSB inserting accomplishes well-groomed steadiness between the load competence and visual feature. On the other hand, the LSB substitution technique turns over's one half of the least-significant bits. So the manufactured articles in the statistics of the image region unit are simple to be distinguished [18].

Patel and Dave [19] have recommended a novel alternative of LSB based image steganography. In this method both the parties will have to have the same opinion upon a set of delivery service images and confident necessary limitations. Then the sender will choose an image from the set of delivery service images which needs least number of bit exploitations on LSB substitution of top secret information and create stegoimage. Then the receiver on receiving stegoimage will remove LSBs along with the help of the accepted constraints [25].

The probability of estimating constraints is extremely fewer. So extraction without those constraints is very complicated. Here in view of the fact that both the parties have the same opinion upon a set of delivery service images the illustration distinction among stegoimage and unique image can be shrink. Here author has [20] planned a new technique based on steganography method in which data is inserted using modification part method.

In this method key and confidential message will reinstate each pixel. Then for the safety measures of stegoimage palette supported image method is functional by widening procedure. The receiver having the similar underground key is appropriated stretching palette procedure on stegoimage using modification part extraction procedure to remove the information. This method has advanced competence and enhanced imperceptibility [21].

In this research paper [11] author has suggested a secure image steganographic representation using RSA algorithm and LSB incorporation. In this technique, the underground information is primary encrypted by means of recipient's RSA public key. Then each bit of the encrypted

communication is introduced to the LSBs of image in unusual images so as to discover the most excellent cover representation. Best wrap image is the one which need minimum number of LSB changes. The recipient on receiving the stego image will remove the message in the encrypted form and will decrypt it by means of private key.

In this research paper [27] has suggested a visual cryptography come within reach of for color images. In their method, each pixel of the shade clandestine image is distended into a 2×2 chunk to form two distribution images. Each 2×2 chunk on the distribution image is barren with red, green, blue and white (transparent), in that order and consequently no evidence about the secret image can be recognized from any one of these two shares unaccompanied.

In this research paper [29] maintained that there would be 24 promising arrangements according to the permutation of the four colors. For the reason that human eyes cannot distinguish the color of an exceptionally tiny sub pixel the four-pixel colors will be pleased as a standard color. When stacking the communicating blocks of the two shares there would be 242 distinctions of the consequential color for forming a color image.

In this research paper [13] here they recommend a new research on criteria of a color image distribution algorithm which primary generates a palette of a secret image and allocates an only one of its kind code to each color on the palette. It then chooses two colored cover images O1 and O2 with amount the similar as the secret image. Every pixel in the two cover images will be enlarged into a block with $M (k \times k)$ sub pixels, of which $[(M/2) + 1]$ sub pixels are arbitrarily preferred and plugged with the color of the enlarged pixel and they have a break are filled with white (transparent) color.

The collection circumstance is that N positions of the two enlarged blocks are extend beyond, where N is the directory of the palette of the secret image and is employed to designate the pixel color split by the two expanded blocks. When make progressing the secret image the algorithm calculates the amount of the extend belonging sub pixels of every $k \times k$ block in the two disguise images and then recovers the N th color from the palette to recreate the color of the equivalent pixel of the secret image. But this technique cans only arrangement with a color image with inadequate unusual colors [19].

6. PROPOSED ALGORITHM

Input: Taken input as Clandestine Gray level image (SI)

Output: Valid Output Shares Share1, Share2

Method:

Step1:- Pixel S_{ij} with position i and j is the input called actual pixel.

Step2:- Smear pixel problem i.e $S_{ij}' = 255 - S_{ij}$.

Step3:- Use quasi – accidental quantity producer (0.1 to 0.9) to decrease S_{ij}' haphazardly.

Step4:- Take the variation of S_{ij}' with innovative pixel S_{ij} .

Step5:- Use quasi haphazard quantity producer to reduce upturned charge of S_{ij}' erratically.

Step6:- Smear pixel setback i.e $S_{ij}'' = 255 - S_{ij}'$

Step7:- Stockpile in surroundings as image called segment 1.

Step8:- Take the modification of two possibility figure producers with inventive pixel S_{ij}

Step9:-Smear pixel setback i.e $S_{ij}''' = 255 - S_{ij}'$.

Step10:- Store S_{ij}''' in middle as image called split 2.

Step 11:-Heap together the portion 1 and share 2

Step 12:-Smear the sigmoid disguise to every pixel

Step 13:-Exhibition the final encrypted image

Flowchart for proposed technique-

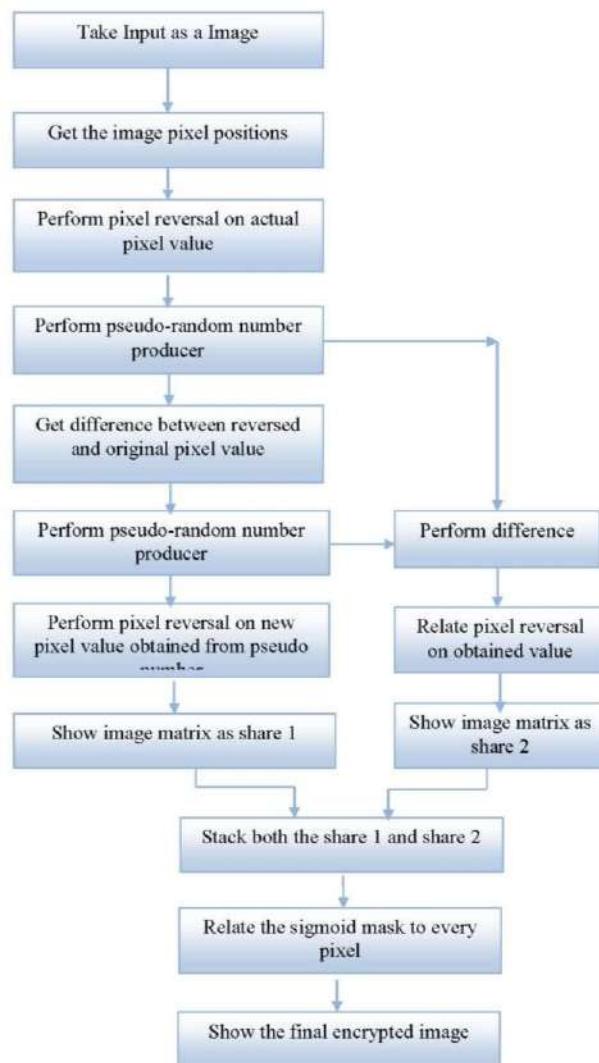


Figure 4. Proposed Pseudo - Randomized Enhanced Visual Cryptography techniques Algorithm for Visual Information

CONCLUSION

Visual cryptography techniques are the present area of research domain where lot of scope exists. Presently this precise cryptographic technique is existence second-hand by numerous countries for covertly transmission of hand written brochures, financial brochures, text images, web based internet voting etc. There are numerous advanced thoughts and allowances come about for the basic pictorial cryptographic model introduced till now. Visual Cryptography techniques delivers one of the protected conducts to transmission images on the Internet system. The benefit of pictorial cryptography techniques is that it adventures human eyes to decode clandestine images with no computation required. Our aim procedure tries to overwhelm the disadvantage of the existing approach by smearing sigmoid purpose in spatial sphere for contrast upgrading in the output clandestine image. The subsequent image enjoys a much developed readability and proves highly efficient in dealing with poor contrast images. This approach



augments particulars in images without touching the details or increasing any amount of noise present to the resultant image.

REFERENCES

1. G. Wang, &W. Yan, &M. Kankanhalli," Content based authentication of visual cryptography", Springer 29 April 2016, PP 102-117.
2. Ankush V. Dahat, Pallavi V. Chavan, "Secret Sharing Based Visual Cryptography Scheme Using CMY Color Space", International Conference on Information Security & Privacy (ICISP2015), 11-12 December 2015, Nagpur, INDIA , Science Direct, PP 563-570.
3. Dao-Shun Wang, Tao Song, Lin Dong, and Ching-Nung Yang," Optimal Contrast Grayscale Visual Cryptography Schemes with Reversing", IEEE TRANSACTIONS ON INFORMATION FORENSICS AND SECURITY, VOL. 8, NO. 12, DECEMBER 2013, PP 2059- 2072.
4. L. G. Fang, Y. M. Li, and B. Yu, "Multi-secret visual cryptography based on reversed images," in Proc. Third Int. Conf. Inform. And Computing Sci.(ICIC 2010), 2010, pp. 195–198, IEEE.
5. P. Tuyls, H. D.L. Hollmann, J. H. van Lint, and L. Tolhuizen, "XORbased visual cryptography schemes, "Designs, Codes, Cryptography, vol. 37, pp. 169–186, 2005.
6. D. S. Wang, L. Zhang,N.Ma, and X.Li, "Two secret sharing schemes based on Boolean operations,"Pattern Recognit., vol. 40, pp. 2776–2785,2007
7. R. Youmaran, A. Adler, A. Miri,. An Improved Visual Cryptography Scheme for Secret Hiding. 23rd Biennial Symposium on Communications, pp.340 - 343, 2006.
8. Shenchuan LIU, Masaaki FUJIYOSHI, and Hitoshi KIYA. A Leakage Suppressed Two-level Security Visual Secret Sharing Scheme. International Symposium on Intelligent Signal Processing and Communication Systems (ISPACS) December 7-9, 2011.
9. Pallavi V. Chavan, Dr. Mohammad Atique, Design of Hierarchical Visual Cryptography. Nirma University International Conference On Engineering, Nuicone-2012, 06-08 DECEMBER, 2012.
10. Meera Kamath, Arpita Parab, Aarti Salyankar, Surekha Dholay. Extended Visual Cryptography for Color Images Using Coding Tables. International Conference on Communication, Information & Computing Technology (ICCICT), Oct.19-20, 2012
11. Manoranjan Mohanty, Christian Gehrman , Pradeep K. Atrey Avoiding Weak Parameters in Secret Image Sharing. IEEE VCIP'14, Dec.7-Dec.10, 2014, Valletta, Malta. 2014.
12. Pallavi Chavan, Dr. Mohammad Atique ,Dr. Latesh Malik. Signature Based Authentication using Contrast Enhanced Hierarchical Visual Cryptography. IEEE Students Conference on Electrical, Electronics and Computer Science, 2014.
13. Vandana G. Pujari, Prof. Shivchandra R. Khot, Prof. Kishor T. Mane. Enhanced Visual Cryptography Scheme for Secret Image Retrieval using Average Filter. IEEE Global Conference on Wireless Computing and Networking (GCWCN)2014, 978-1-4799-6298-3/14, 2014.
14. Cheddad, A. et al. Digital image steganography: Survey and analysis of current methods. Signal Processing, 90(3), 727–752, 2010.
15. Souvik Bhattacharyya, Indradip Banerjee and Gautam Sanyal "A survey of steganography and steganalysis technique in image, text, audio and video as cover carrier" Journal of Global Research in Computer Science Vol. 2, April 2011.
16. Shilpa Gupta, Geeta Gujral and Neha Aggarwal "Enhanced least significant bit algorithm for image steganography" IJCEM International Journal of Computational Engineering & Management, Vol. 15 Issue 4, July 2012
17. Xinpeng Zhang and Shuozhong Wang "Steganography using multiple-base notational system and human vision sensitivity" IEEE Signal Processing Letters, Vol. 12, 2005.
18. Ahmad T. Al-Taani. and Abdullah M. AL-Issa." A novel steganographic method for gray-level images" International Journal of Computer, Information, and Systems Science, and Engineering, Vol. 3, 2009.
19. Neda Raftari , Amir Masoud and Eftekhari Moghadam "Digital image steganography based on integer wavelet transform and assignment algorithm" IEEE Sixth Asia Modelling Symposium, 2012.



20. Peipei Liu, Chuan Chen, Liangquan Ge, and Yaoyao Luo "Efficient self-adaptive image steganography scheme based on iterative blending and integer wavelet transform" Springer Lecture Notes in Electrical Engineering, 2014
21. D. R. L. Prasanna, L. Jani Anbarasi and M. Jenila Vincent "A Novel Approach for Secret Data Transfer using Image Steganography and Visual Cryptography" ICCCS'11, February 2011.
22. Chang, C. C., Chen, T.S and Chung, L. Z., "A steganographic method based upon JPEG and quantization table modification," Information Sciences, vol.[4], pp. 123-138(2002).
23. Provos, N. and Honeyman, P: "Hide and Seek: An introduction to steganography". IEEE security and privacy, 01 (3): 32-44, May-June 2003
24. Hamidreza Rashidy Kanan , Bahram Nazeri, "A novel image steganography scheme with high embedding capacity and tunable visual image quality based on a genetic algorithm" Expert Systems with Applications 41 (2014) 6123–6130
25. Moni Naor and Adi Shamir, "Visual cryptography". In Proceedings of Advances in Cryptology, EUROCRYPT 94, Lecture Notes in Computer Science, 1995, (950):pp. 1-12.
26. Z. Zhou, G. R Arce, and G. Di Crescenzo, "Halftone Visual Cryptography," in Proc. of IEEE International Conference on Image Processing, Barcelona, Spain, Sept 2003, vol. 1, pp. 521–52.
27. F. Liu, C.K. Wu, X.J. Lin, "Colour Visual Cryptography Schemes", IET Information Security, vol. 2, No. 4, pp 151-165, 2008.
28. Nakajima, M. and Yamaguchi, Y., "Extended visual cryptography for natural images" Jour Bernd Borchert, "Segment-based Visual Cryptography", WSI 2007, ISSN 0946-3852. nal of WSCG. v10 i2. 303-310.
29. Jyoti, Md. Sabir, "More Secured Steganography Model with High Concealing Capacity by using Genetic Algorithm, Integer Wavelet Transform and OPAP" International Journal on Recent and Innovation Trends in Computing and Communication, ISSN 2321 – 8169 Volume: 1 Issue: 4 MAR 2013
30. Po-Yueh Chen and Hung-Ju Lin, "A DWT Based Approach for Image Steganography", International Journal of Applied Science and Engineering 2006. 4, 3: 275-290.
31. J. K. Mandal, A. Khamrui. A Data Embedding Technique for Gray scale Image Using Genetic Algorithm (DEGGA). International Conference on Electronic Systems (ICES-2011).
32. S. Johri., "An Adaptive Steganography Technique for Gray and Colored Images," Journal of Global Research in Computer Science, vol. 3, pp. 41-45, 2012
33. V. Rijmen, B. Preneel, Efficient colour visual encryption for shared colors of Benetton, Eurocrypto'96, Rump Session, Berlin, 1996.
34. C.C. Chang, C.S. Tsai, T.S. Chen, A technique for sharing a secret color image, Proceedings of the Ninth National Conference on Information Security, Taichung, May 1999, pp. LXIII–LXXII.
35. Elham Ghasemi, Jamshid Shanbehzadeh, and Nima Fassihi, "High Capacity Image Steganography Based on Genetic Algorithm and Wavelet Transform" S.I. Ao et al. (eds.), Intelligent Control and Innovative Computing, Lecture Notes in Electrical Engineering 110, DOI 10.1007/978-1-4614-1695-1 30
36. Abhishek Parakh and Subhash Kak "A Recursive Threshold Visual Cryptography Scheme", CoRR abs/0902.2487: (2009).